

SITA

# Contact-free cleanliness inspection of part surfaces by fluorescence measurement



**SITA CleanoSpector**

**Cleanliness inspection – Layer thickness monitoring**

# SITA *CleanoSpector*

## Advantages

### Features

- Mobile and robust measuring device for flexible use at the process and in the laboratory
- Intuitive operation: simple and fast measurement
- Automatic calibration on reference surfaces

### Application fields


- Contact-free cleanliness inspection of part surfaces at the push of one button
- Quality assurance of industrial cleaning processes
- Layer thickness measurement e.g. of corrosion protection



### Benefits

- Highest product quality by monitoring limit values
- Documentation of slightest contamination on various shaped surfaces
- Efficiency by process optimization

## Fluorescence measuring principle

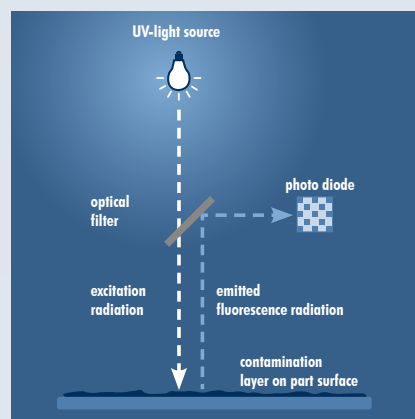

# Cleanly inspected

## Application examples

- Monitoring the cleanliness of automobile pistons before coating
- Incoming and outgoing control of housing parts after cleaning and before gluing processes
- Controlling the cleanliness of stainless steel parts before laser welding
- Evaluating the cleanliness of medical implants
- Detecting residual fluxing agents on bond pads before bonding



**The SITA CleanoSpector  
assures a high part quality  
in surface treatment processes.**

# SITA *CleanoSpector*

## Technical Data

### Cleanliness

Measuring range	0...100 %
Resolution	0.1 %

### Fluorescence intensity

Measuring range	0...2,000 RFU [Relative Fluorescence Unit]
Max. deviation	0.5 % of measuring range
Resolution	0.1 RFU
Excitation*	365 nm, max. 150 mW
Detection*	460 nm
Measuring point*	D = 1 mm
Measuring distance*	4.7 mm

\* Standard values

### Layer thickness

Measuring range	user-defined
-----------------	--------------

### Power supply

Mains adapter / USB	100...240 / 5V
Li-Ion battery	3.6 V / 1,950 mAh min. 8 h operating time
Power consumption	2.5 W max.

### Interface, memory, dimension, weight

USB-interface	data transfer
Display	LCD, illuminated
Measuring profiles	254
Memory	8,000 measuring values / profile
Dimensions (LxWxH)	
Hand-held device	129x82x48 mm
Sensor head	95x50x30 mm
Weight (device)	530 g

## Windows-Software SITA-ProcessLog (optional)

- Guided part inspection and graphical display of measuring points on part surfaces
- Documentation and evaluation of the part cleanliness
- Administration and analysis of saved measuring values
- Quick and easy preparation of test reports
- Controlling the measurement via PC
- Simple generation and administration of measuring profiles

## Contact



**盛慶企業有限公司**  
SHENG-CING INSTRUMENTS CO.,LTD

高雄:(07)313-5388 台北:(02)2808-4030  
E-mail: [service@shengcing.com](mailto:service@shengcing.com)  
[www.shengcing.com](http://www.shengcing.com)

SITA Messtechnik GmbH  
Gostritzer Straße 63  
01217 Dresden  
Germany

Tel.: +49 (0)351 8 71 8041  
Fax: +49 (0)351 8 71 8464  
[info@sita-process.com](mailto:info@sita-process.com)  
[www.sita-process.com](http://www.sita-process.com)